



fancort industries, inc. TM

Model FF-200 -- FF-400

Overview

Recirculating fume extraction is now extremely important with the rising concern for our environment and employee safety. Fancort Fume Extractors provide not only a flexible and portable process for plant redesigns and expansions, but also a more stable process by providing a controlled airflow to remove harmful fumes. All this while eliminating the added costs of building modifications, increased air handling systems.


Features

- ▶ Automatic Flow Control maintains constant extraction rate.
- ▶ Adjustable Air Flow extends filter life.
- ▶ Blocked Filter Warning.
- ▶ Easy to change filters.
- ▶ Low energy consumption.
- ▶ Quiet operation.
- ▶ Welded stainless steel construction.
- ▶ Reverse Air Flow prevents condensation and extends filter life.
- ▶ Continuous run brushless motors.
- ▶ HEPA filtration removes 99.997% of particles down to .3 microns.
- ▶ Gas and particle sensors on exhaust.
- ▶ Filter Blocked Monitor.
- ▶ Gas Safety Sensor.
- ▶ Particle Safety Sensor.
- ▶ Motor Run Indicator.
- ▶ Airflow reading.
- ▶ Filtered air temperature.
- ▶ Quick-read visual display.
- ▶ Remote Machine Interface.



Model FF-200/FF-400

Informative Visual Display

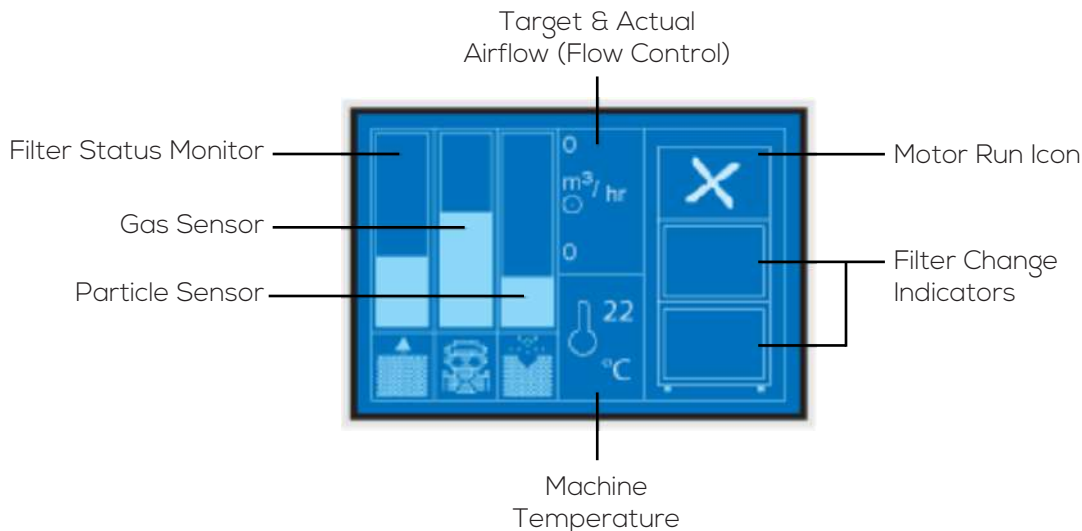




fancort industries, inc. TM


Model FF-200 -- FF-400

FF-200/FF-400 Vacuum Control

Main Filter Options		
	HEPA/Chemical	113505
	HEPA/Twin Chemical	113579
	HEPA/Chemical Cleanroom*	113512
	Chemical	113508
*Use F8/F9 Pre-filter		

Pre-Filter		
	F5 Pack of 4	202260

	FF-200		FF-400	
Model	081026D	081026D	080411D	080410D
Voltage (50hz/60hz)	120v (1ph)	230v (1ph)	120v (1ph)	230v (1ph)
Wattage	2.4 kW	2.4 kW	1.37 kW	1.30 kW
Airflow	88 cfm (150 m ³ /Hr)		275 cfm (467 m ³ /Hr)	
Vacuum	69 inwg (17.29 kPa)		40 inwg (9.92 kPa)	
Air Inlet	4.92in (125mm) Safe Seal			
Sound Rating	65 dBA			
Dimensions (L/W/H)	17.5in x 21in x 28in			
Weight	110.25lbs			

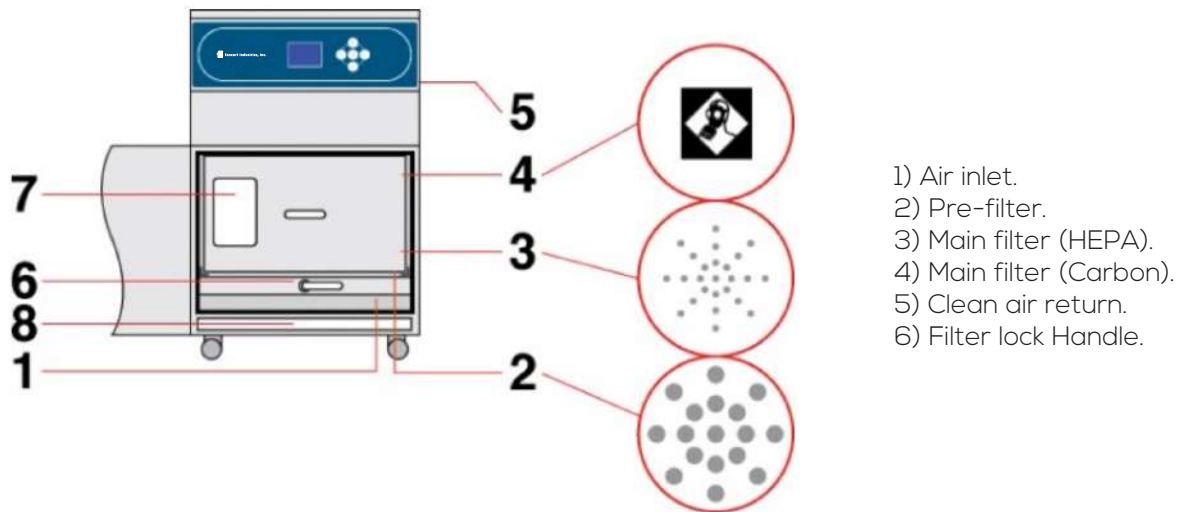

www.fancort.com
 31 Fairfield Place West Caldwell, NJ 07006
 sales@fancort.com
 (P) 1.888.FANCORT
 (P) 973.575.0610