
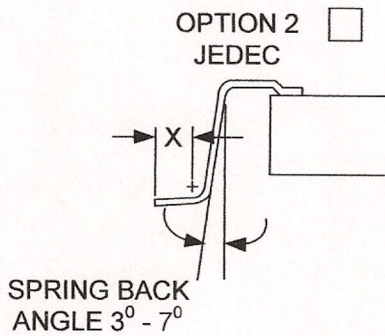


Package Type: Ceramic
 Lead Type: Flat Pack
 Toe: Up 0° to 4°

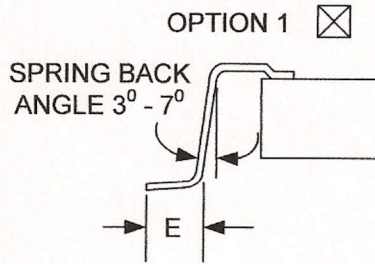

	Dim.	Tolerance
A	.025	.005
C	.010	MAX
D	1.205	.010
E	.050	.005
X		
F	.300	MAX
G	.012	.002
H	.012	.002
J	.270	MAX
M	1.005	MAX
N	.895	MAX
N1	.050	MAX
PACKAGE LENGTH	Y	.860
LEAD WIDTH	L	.022
PITCH		.040
# OF LEADS PER SIDE		20

40 Lead Flat Pack Maxwell -