



Package Type: Ceramic
 Lead Type: Flat
 Toe: Down 0° to 4°

OPTION 1
 OPTION 2

OPTION 1

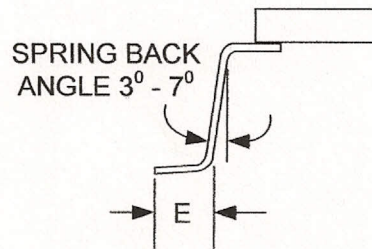

OPTION 2
 JEDEC

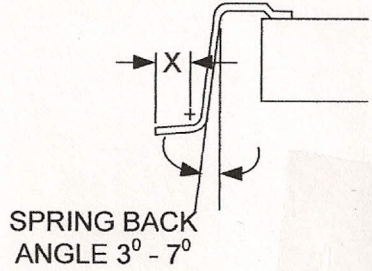

	DIM X	DIM Y	Tolerance
A	.025	.025	.005
C	.008	.008	MAX
D	1.578	1.578	.010
E	.050	.050	.005
X			
F	.381	.381	MAX
G	.010	.010	.002
H	.010	.010	.002
J	---	---	---
K	.805	.805	BSC
L	.010	.010	MAX
M	1.363	1.363	MAX
PITCH	.025	.025	
# OF LEADS PER SIDE	33	33	
TOTAL # OF LEADS	132		

MAXWELL

132 PIN CERAMIC QFP